
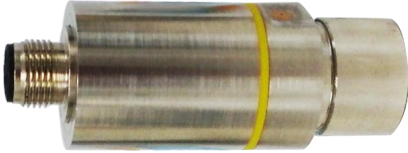


<p>PB1161 Compact Pressure Sensor M12 socket Connection: Internal thread G1/4 Analogue output Sensing range 0...2bar 0...29Psi 0...2 kgf/cm2</p>	 <p>CE RoHS</p>
<p>Applications</p>	<p>Pressure: corresponding pressure Liquid and gas</p>
<p>Supply voltage[V]</p>	<p>18...36DC</p>
<p>Reverse polarity protection</p>	<p>Yes</p>
<p>Voltage drop[V]</p>	<p><2</p>
<p>Current consumption[mA]</p>	<p><30</p>
<p>Overloading Pressure[bar]</p>	<p>4</p>
<p>Burst pressure[bar]</p>	<p>8</p>
<p>Analogue output</p>	<p>0...10V</p>
<p>Analogue output load[Ohm]</p>	<p>4...20 mA : Max (Ub-10V) x 50 / 0...10V : Min 2000</p>
<p>Consumption</p>	<p>0.72W Max</p>
<p>Final value measured[%]</p>	<p>< ±1</p>
<p>Measuring Accuracy[%]</p>	<p>±1</p>
<p>Output response time[ms]</p>	<p>3</p>
<p>Ambient temperature [°C/°F]</p>	<p>-25...80/-13...176</p>
<p>Medium temperature [°C/°F]</p>	<p>-25...80/-13...176</p>
<p>Storage temperature[°C/°F]</p>	<p>-40...100/-40...212</p>
<p>Protection/Enclosure Rating</p>	<p>IP68</p>
<p>Insulation resistance[MΩ]</p>	<p>> 100(500 V DC)</p>
<p>Dimension[mm]</p>	
<p>ESD EN61000-4-2</p>	<p>4kV (Level 2)</p>
<p>EFT EN61000-4-4</p>	<p>2kV (Level 3)</p>
<p>Walkie talkie experiment[mm]</p>	<p><10</p>
<p>Shock resistance[g]</p>	<p>50</p>

Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	V2A(1.4305)/Ceramic/FPM(Viton)/Probe:Stainless steel 316L
Connection	M12 socket
Wiring Core color	<p>The diagram shows a square M12 socket with four terminals labeled 1, 2, 3, and 4. Terminal 1 is connected to a wire labeled BN, which goes to L+. Terminal 2 is connected to a wire labeled WH, which goes to a terminal of a switch labeled O~10V. Terminal 4 is connected to a wire labeled BK, which goes to another terminal of the O~10V switch. Terminal 3 is connected to a wire labeled BU, which goes to L-. The switch is also labeled N.C. (Normally Closed). To the left, a circular core color diagram shows four terminals: 1 (BN) at the top, 2 (WH) on the left, 3 (BU) on the right, and 4 (BK) at the bottom.</p>

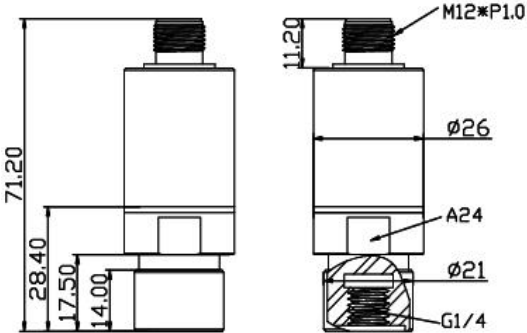

ema electronics

website: www.ema-electronic.com

e-mail: sales@ema-electronic.com