

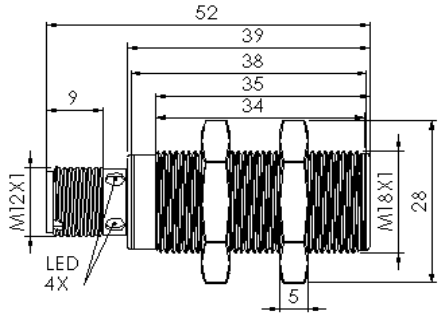
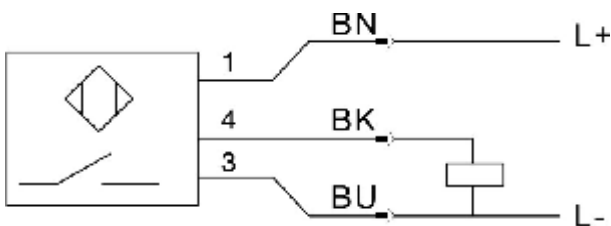
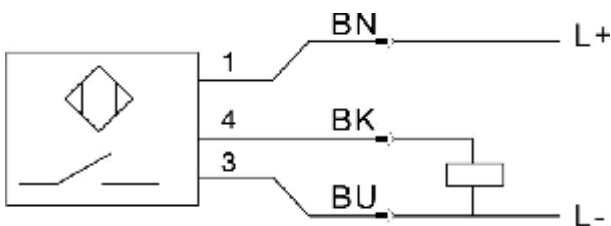


<p>IC1009 Inductive proximity sensor Metal thread M18 x 1.0 M12 Socket Size 52mm Gold-plated contact Sensing range 5mm[f] Flush</p>	
Electric design	DC PNP
Output	NO 
Operating voltage [V]	10...36 DC
Current loading [mA]	250
Short-circuit protection	Yes
Reverse polarity protection	Yes
Overload protection	Yes
Voltage drop [V]	<2.5
Consumed current[mA]	<15(24VDC)
Real sensing range [mm]	5 ± 10%
Operating range [mm]	0...4
Switch-point drift [%/Sr]	-10...10
Hysteresis [%/Sr]	1...15
Switching frequency [Hz]	400
ESD[KV]	6kV III
EFT[KV]	2kV III
Walkie talkie experiment[mm]	<1
Adjustment factors	Low carbon steel=1 /Stainless steel approx 0.7 /Brass approx 0.4 / Aluminum approx 0.3 / Copper approx 0.2
Operating temperature [°C]	-25°C...80°C
Protection classification	IP67
Dimension	
Housing material	Stainless steel , Sensing face: PBT
Switching state display LED	Red(90° )
Connection	M12 Socket
<p>Wiring</p> <p>Core color</p> <p>BN 白色 BU 蓝色 BK 黑色</p> <p>BN 棕色 BK 黑色</p> <p>Signal Line</p> 	
Accessory(Included)	Two fixed nuts