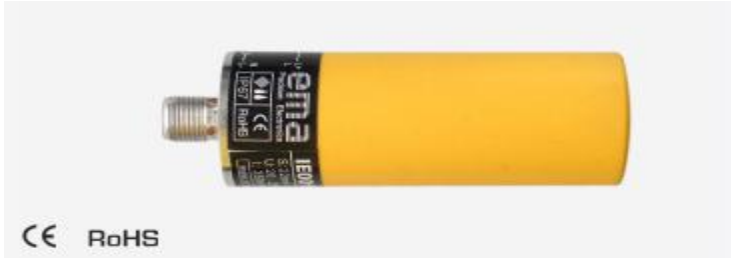

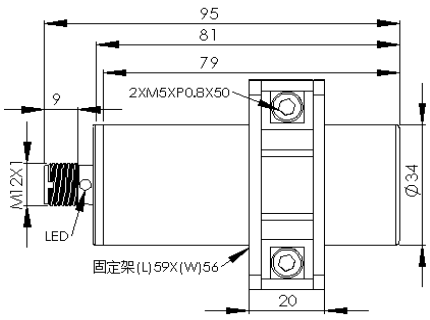
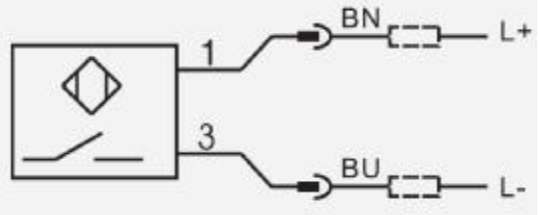


<p>IE1111 Inductive proximity sensor Plastic housing 34 M12 Connector Size 81mm Sensing range 30mm[nf] Non-flush</p>	 <p>CE RoHS</p>
Electric design	DC 2 wire
Output	NO 
Operating voltage[V]	10...36 DC
Current loading[mA]	350
Short-circuit protection	Yes
Reverse polarity protection	Yes
Overload protection	Yes
Voltage drop[V]	< 5.5
Consumed Current[mA]	< 0.6 (24 V DC)
Real sensing range[mm]	30±10%
Operating range[mm]	0...24
Switch-point drift[%/Sr]	-10...10
Hysteresis[%/Sr]	1...15
Switching frequency[Hz]	50
Adjustment factors	stainless steel approx.0.7 / brass approx.0.5 / Aluminum approx.0.4
ESD[KV] EN61000-4-2	6kV III
EFT[KV] EN61000-4-4	2kV III
Walkie talking experiment[mm]	<1
Operating temperature[°C/°F]	-25...80
Protection classification	IP67
Note:	Attention: please check the safety function of the product after short circuit
Dimension [mm]	
Housing material	PBT+GF
Function display switching status LED	Red(90°)
Connection	M12 Connector
Wiring Core color	 <p>W1 白色 BN 棕色 BU 蓝色 BK 黑色</p>
Accessory(Included)	Mounting clamp