

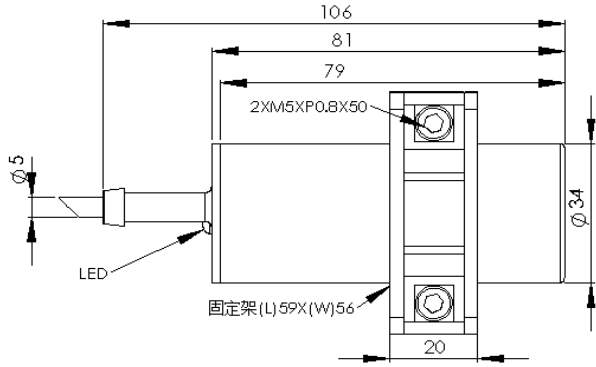
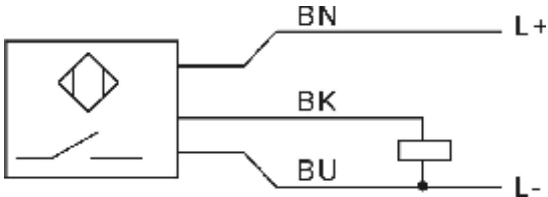


<p>IE1202 Inductive proximity sensor Plastic housing 34 High temperature type Cable Size 81mm Sensing range 30mm[nf] Non-flush</p>	 <p>CE RoHS</p>
Electric design	DC PNP
Output	NC 
Operating voltage[V]	10...36 DC
Current loading[mA]	350
Short-circuit protection	Yes
Reverse polarity protection	Yes
Overload protection	Yes
Voltage drop[V]	<2.5
Consumed Current[mA]	<15(24VDC)
Real sensing range[mm]	20±10%
Operating range[mm]	0...16
Switch-point drift[%/Sr]	-10...10
Hysteresis[%/Sr]	1...15
Switching frequency[Hz]	100
Adjustment factors	low carbo steel=1 / stainless steel approx.0.7 / brass approx.0.5 / Al umi um approx.0.4 / copper approx.0.3
ESD[KV] EN61000-4-2	6kV III
EFT[KV] EN61000-4-4	2kV III
Walkie talking experiment[mm]	<1
Operating temperature[°C/°F]	-25...120
Protection classification	IP67
Dimension[mm]	
Housing material	PBT+GF
Function display switching status LED	Red(90°)
Connection	Silicone cable /2m; 3x0.34mm ²
<p>Wiring</p> <p>Core color</p> <p>BN +</p> <p>BU -</p> <p>BK Signal line</p>	
Accessory(Included)	Mounting clamp