

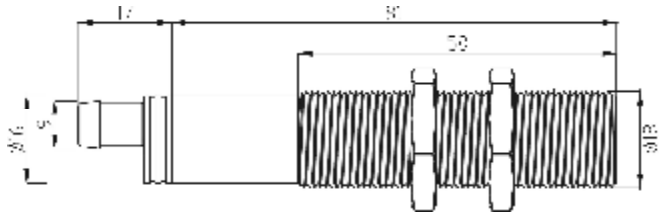
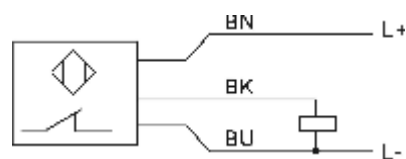


<p>CA0005 Capacitive Proximity Sensor Plastic housing M18 X 1 Cable Against electromagnetic interference Sensing range 8mm[nf] Adjustable 3...8mm Non-flush</p>	 <p>CE RoHS</p>
Electric design	DC PNP
Output	NC 
Operating voltage[V]	10...36 DC
Current loading[mA]	250
Short-circuit protection	Yes
Reverse polarity protection	Yes
Overload protection	Yes
Voltage drop[V]	< 2.5
Consumed current[mA]	< 13 (24V)
Hysteresis[%/Sr]	8 ± 10%
Hysteresis[%/Sr]	0...6.5
Switch-point drift [%/Sr]	-15...15
Hysteresis[%/Sr]	1...15
Switching frequency [Hz]	Hysteresis[%/Sr]
Adjustment factors	Water=1 / Glass approx.0.4 / Ceramic approx .0.2 / PVC approx.0.2
Operating temperature [°C]	-25°C...80°C
Protection classification	IP67
Dimension	
Housing material	PBT+GF
Switching state display LED	Red
Connection	PVC-Cable /2m;2x0.34mm ²
Wiring Core color BN + BU - BK Signal Line	
Accessory (Included)	Fixed nut and screwdriver