
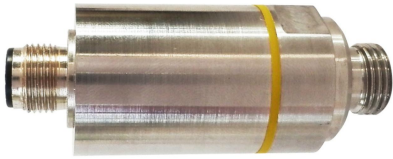


<p>PB2160 Compact Pressure Sensor M12 socket Connection: External thread G1/4 Analogue output Sensing range -1...1bar -14...14Psi -1...1 kgf/cm2</p>	 <p>CE RoHS</p>
Applications	Negative pressure: corresponding pressure
	Liquid and gas
Supply voltage[V]	18...36DC
Reverse polarity protection	Yes
Voltage drop[V]	<2
Current consumption[mA]	<30
Overloading Pressure[bar]	4
Burst pressure[bar]	6
Analogue output	0...10V
Analogue output load[Ohm]	4...20 mA : Max (Ub-10V) x 50 / 0...10V : Min 2000
Consumption	0.72W Max
Final value measured[%]	< ±1
Measuring Accuracy[%]	±1
Output response time[ms]	3
Ambient temperature [°C/°F]	-25...80/-13...176
Medium temperature [°C/°F]	-25...80/-13...176
Storage temperature[°C/°F]	-40...100/-40...212
Protection/Enclosure Rating	IP68
Insulation resistance[MΩ]	> 100(500 V DC)
Dimension[mm]	
ESD EN61000-4-2	4kV (Level 2)
EFT EN61000-4-4	2kV (Level 3)
Walkie talkie experiment[mm]	<10
Shock resistance[g]	50

Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	V2A(1.4305)/Ceramic/FPM(Viton)/Probe:Stainless steel 316L
Connection	M12 socket
Wiring Core color	<p>The diagram shows a square component with four terminals labeled 1, 2, 4, and 3. Terminal 1 is connected to a terminal labeled BN, which is further connected to L+. Terminal 2 is connected to a terminal labeled WH, which is connected to O~10V. Terminal 4 is connected to a terminal labeled BK, which is connected to N.C. Terminal 3 is connected to a terminal labeled BU, which is connected to L-. A separate diagram shows a circular component with four terminals labeled WH ②, BU ③, ① BN, and ④ BK.</p>

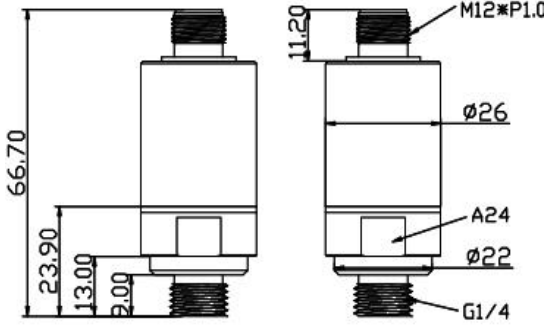

ema electronics

website: [www.ema-electronic.com](http://www.ema-electronic.com)

e-mail: [sales@ema-electronic.com](mailto:sales@ema-electronic.com)