



Diffuse reflection

PD-32-DQ




PD-32-SQ

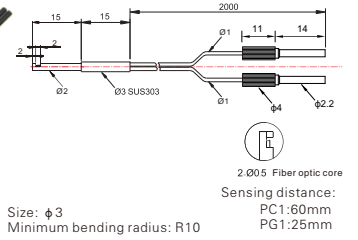


Thru-beam

PT-32-DQ

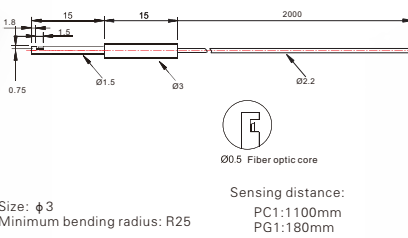

PT-32-SQ

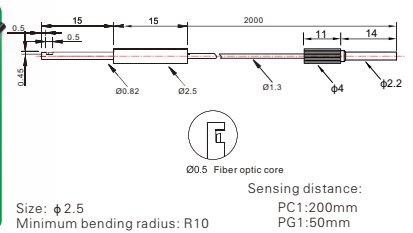

Fiber Optic
Slot Sensors
Photoelectric
Laser
Proximity
Displacement
Magnetic
Contact
Area
Ultrasonic
Vision
Vibration
Temperature
Annexes

Guidance

Fiber amplifiers
Standard economical
High stability
High performance type
High speed response
Color sensor

Fiber components
Popular type
Array-type
Flat bracket type
Side-view type
High elastic type
High temperature resistant
Small spot type
Combination type
High end type

Fiber lens
Fiber lens

*PG1: TEGA with a threshold setting of 200;
PC1: 7-step with a threshold setting of 200.
*Cable length listed above can be customized.