
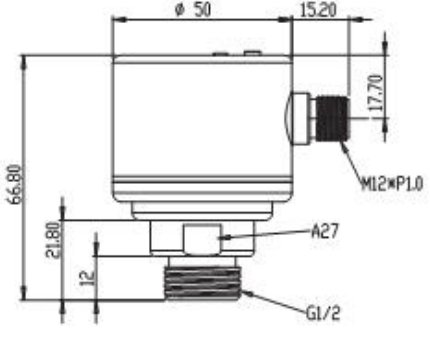


<p>FL6401</p> <p>Remote Flow Sensor</p> <p>Control Monitor</p> <p>Stainless Steel Housing</p> <p>Seal Plus structure</p> <p>External thread G1/2"A</p> <p>Programmable</p> <p>M12 socket</p>	
Applications	Liquid and gas
Electric design	PNP NO/NC
Supply voltage[V]	20...36 DC
Output	<p>NO </p> <p>NC </p>
Max. overload current[mA]	400
Reverse polarity protection	Yes
Overload protection	Yes
Watchdog	Yes
Max. overload current[mA]	<80
Max. temperature drift[K/min]	300
Pressure resistance[bar]	300
Liquid temperature[°C/°F]	-25...80/-13...176
Liquid setting range[cm/S]	3...300
Max sensitivity of range for liquid[cm/S]	3...100
Gas temperature[°C/°F]	-25...80/-13...176
Gas setting range[cm/S]	200...3000
Max sensitivity of range for gas[cm/S]	200...800
Startup time[s]	< 8
Output response time[s]	< 2
Ambient temperature[°C/°F]	-25...80/-13...176
Protection/Enclosure Rating	IP68
Dimensions[mm]	

ESD EN61000-4-2	6kV-CD / 8kV-AD
EFT EN61000-4-4	2kV
Shock resistance[g]	50
Vibration resistance[g]	20
Upper cover material	Stainless steel 316L
Housing material	Stainless steel 304
Function Display	Flow : 10 x 3 colors LED
Connection	M12 socket
Wiring	<p>BN → L+</p> <p>BU → L-</p> <p>BK → N.C.</p> <p>RD → N.O.</p> <p>WH → COM</p>
Core color	
Pin 1=BN	
Pin 2=WH	
Pin 3=BU	
Pin 4=BK	
Pin 5=RD	



ema electronics

website: [www.ema-electronic.com](http://www.ema-electronic.com)

e-mail: [sales@ema-electronic.com](mailto:sales@ema-electronic.com)