

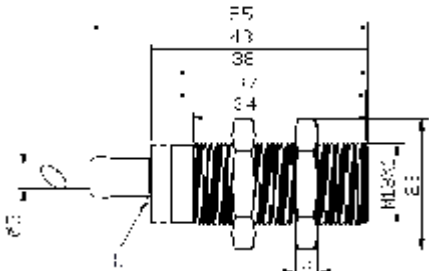
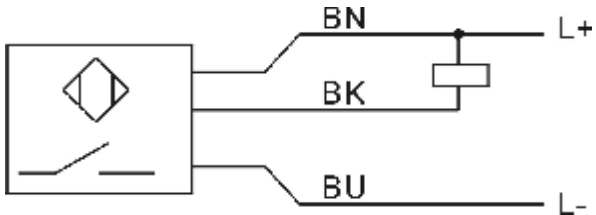


<p>IC1103</p> <p>Inductive proximity sensor</p> <p>Metal thread M18 x 1.0</p> <p>Cable</p> <p>Size 43mm</p> <p>Sensing range 7mm[f]</p> <p>Flush</p>	
Electric design	DC NPN
Output	NO 
Operating voltage [V]	10...36 DC
Current loading [mA]	250
Short-circuit protection	Yes
Reverse polarity protection	Yes
Overload protection	Yes
Voltage drop [V]	<2.5
Consumed current[mA]	<15(24VDC)
Real sensing range [mm]	7±10%
Operating range [mm]	0...5.6
Switch-point drift [%/Sr]	-10...10
Hysteresis [%/Sr]	1...15
Switching frequency [Hz]	400
ESD[KV]	6kV III
EFT[KV]	2kV III
Walkie talkie experiment[mm]	<1
Adjustment factors	Low carbon steel=1 /Stainless steel approx 0.7 /Brass approx 0.4 / Aluminum approx 0.3 / Copper approx 0.2
Operating temperature [°C]	-25°C...80°C
Protection classification	IP67
Dimension	
Housing material	Stainless steel , Sensing face: PBT
Switching state display LED	Red(90° )
Connection	PVC Cable /2m; 3x0.34mm <sup>2</sup>
<p>Wiring</p> <p>Core color</p> <p>BN +</p> <p>BU -</p> <p>BK Signal Line</p>	
Accessory(Included)	Two fixed nuts